


# PS2400E Storage Array

*A large capacity, high performance system designed for the high-end data center*

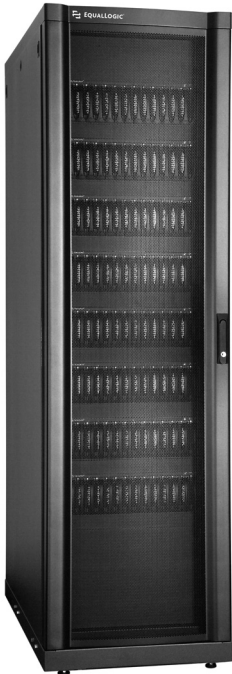

## PS2400E Storage Array

The PS2400E offers 56 TB of capacity, up to 2400 MB/sec, 480,000 IOPS within a standard 24U rack<sup>4</sup> for applications that require capacity without compromising performance including data intensive environments including data warehousing, life sciences, large databases, streaming media, and geophysical applications.

Data services include:

- Auto-replication
- Automatic load balancing
- Auto-snapshot Manager<sup>1</sup>
- Auto-stat Disk Monitoring System
- Multi-path I/O<sup>2</sup>
- PS Group Manager
- Snapshot and Auto-Replication Scheduler
- Storage virtualization
- Volume cloning
- Volume management
- Volume snapshot - (Up to 512 per volume, read-only and read/write)

## Technical Highlights

Volumes	Up to 1,024
Snapshots	Up to 10,000
Hosts accessing group	Up to 256
Host interface	Any standards-compliant iSCSI initiator
Controllers	16
Disk capacity	500 GB*, 7,200 RPM
System <sup>3</sup> capacity	56 TB**
Number of drives	112
I/Os per second	480,000
Memory (battery-backed)	16 GB
Gb network interfaces	24
Copper (standard)	
Optical (SFP purchased separately)	
Sustained system bandwidth (MB/sec)	2400
Operating systems supported	Windows 2000, Windows Server 2003, NetWare, Windows XP, Linux, Solaris, AIX, HP-UX, Mac OS X
Upgrade option	System can be combined with other PS systems in a single SAN

## RAID Support

Automatic RAID 10 and RAID 50 configuration

## Reliability

Redundant, hot-swappable controllers, power supplies, cooling fans, and disks

Mirrored write-back cache with 72-hour battery backup

Individual disk drive slot power control

Automatic spare configuration and utilization

## SMART

Automatic bad block replacement

Auto-stat Disk Monitoring System (ADMS) to monitor health of data on disk drives

## Management Interfaces

SNMP, telnet, SSH, HTTP, Web (SSL), host scripting

Serial console

Multi-administrator support

## Security

CHAP authentication

Access control for iSCSI and management interfaces

**Notification Methods**

SNMP traps, e-mail, syslog

**Power**

Input voltage/Power	100-240 VAC (auto-sensing)/3600VA
Input current	32.0 amperes (maximum) @ 115 volts
Input frequency	50-60 hertz
Power supplies	(8) Dual 400 watts

**Environmental**

Operating temperature	41 to 104 degrees F / 5 to 40 degrees C
Storage temperature	-22 to 140 degrees F / -30 to 60 degrees C
Maximum altitude	10,000 feet
Relative humidity (operational)	8 to 90% non-condensing
Relative humidity (non-operational)	5 to 95% non-condensing
Thermal output	12,000 BTU / hour, 3600 watts
Shock (operating)	30 G for 2ms
Vibration	.1 G @ 10 to 100 hertz

**Physical**

Height	42 inches / 106.68 centimeters
Width	17.625 inches / 44.77 centimeters
Depth	25 inches / 63.5 centimeters
Weight	648 pounds / 293.93 kilograms

**Agency Approvals**

Safety standards	UL 60950, CSA 60950, S Mark, EN 60950 (Europe), CB Scheme
Electromagnetic Compatibility (EMC)	EN 55022 Class A, CE Mark, EN 55024 Immunity, ITE, FCC Class A, VCCI Class A (Japan), AN/NZS 3548 Class A (Australia /New Zealand)

**Limited Warranty**

2 years, 1 year battery, 3 years disks  
 5 x 9 telephone support  
 1 year software updates  
 90 days advanced parts replacement

**Support Agreements Options**

Basic	Next-day advanced hardware replacement, software updates, 24-hour access to Technical Support Center
Premium	Four-hour onsite advanced hardware replacement, software updates, 24-hour access to Technical Support Center

\*1GB = 1,000,000,000 bytes, useable space may be less      \*\*1TB = 1,000,000,000,000 bytes, useable space may be less  
<sup>1</sup>Qualified for Microsoft Windows Server 2003      <sup>2</sup>Qualified for Microsoft Windows Server 2000 and 2003  
<sup>3</sup>This system could account for up to 8 members within a group.      <sup>4</sup>Rack not included



9 Townsend West, Nashua, NH 03063  
 Tel 603.579.9762 / Fax 603.579.6910 / www.equallogic.com